


H75 - 36 cell series

**36
Cells
SERIES**

- Excellent power output with +ve tolerance up to 4.9wp
- 10-year limited product warranty
- 25 years of power guarantee*
- All the modules are PID resistant
- 100% EL tested

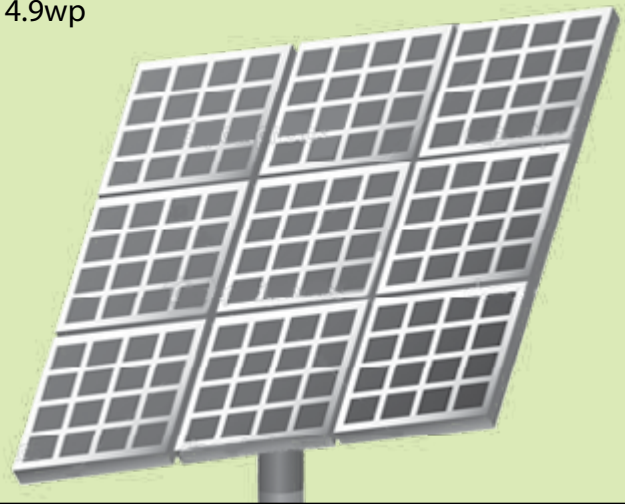

*As per standard warranty terms

- The solar PV modules are constructed with toughened, low iron and textured high light transmission glass
- Multi-layer tedlar-based back sheet and ultra fast cure EVA
- Reinforced anodized aluminium frame
- Pre-drilled frame for easy mounting
- IP65 rated junction box

APPLICATIONS

- Street lighting
- Home lighting

CONSTRUCTIONAL CHARACTERISTICS

- Cells
- Glass
- EVA
- Back sheet
- Copper ribbon
- Frame
- Junction box

CERTIFICATIONS

- IEC 61215 & 61730
- IEC 61701 (Salt Mist Test)
- MNRE (India) certified
- ISO 9001-2008
- CE mark

Manufactured by:

H.R. Solar Solution Pvt. Ltd.

14, NS Road, First floor, Room no. 102, Kolkata - 700001

Phone: +91 33 2243 4540

Website: www.hrsolarsolution.com

Email: info@hrsolarsolution.com



SPECIFICATIONS:

Electrical Characteristics

Maximum Power Pmax (wp)	75wp	80wp
Open Circuit Voltage (Voc)	22.7 V	22.70 V
Optimum Operating Voltage (Vmp)	18.76 V	18.72 V
Optimum Operating Current (Imp)	4.02 A	4.31 A
Short Circuit Current (Isc)	4.29 A	4.69 A
Fill Factor	77.02%	75.14%
Module Efficiency	14.37%	15.32%

Operating Conditions -40°C to +85°C at 85% RH

Temperature Co-efficient for Voc/ °C (B) -0.35%

Temperature Co-efficient for Isc/ °C (a) 0.05%

Temperature Co-efficient for power/ °C (y) -0.40%

NOCT 45°C ± 2°C

Maximum System Voltage 1000 V

Mechanical Characteristics


Weight 5.5 Kg

Module Dimension (W) X (H) X (T) (780x665x30)mm

Static Load Wind / Snow 2400 Pa / 5400 Pa

Fire Rating Class C

Frame Dimension

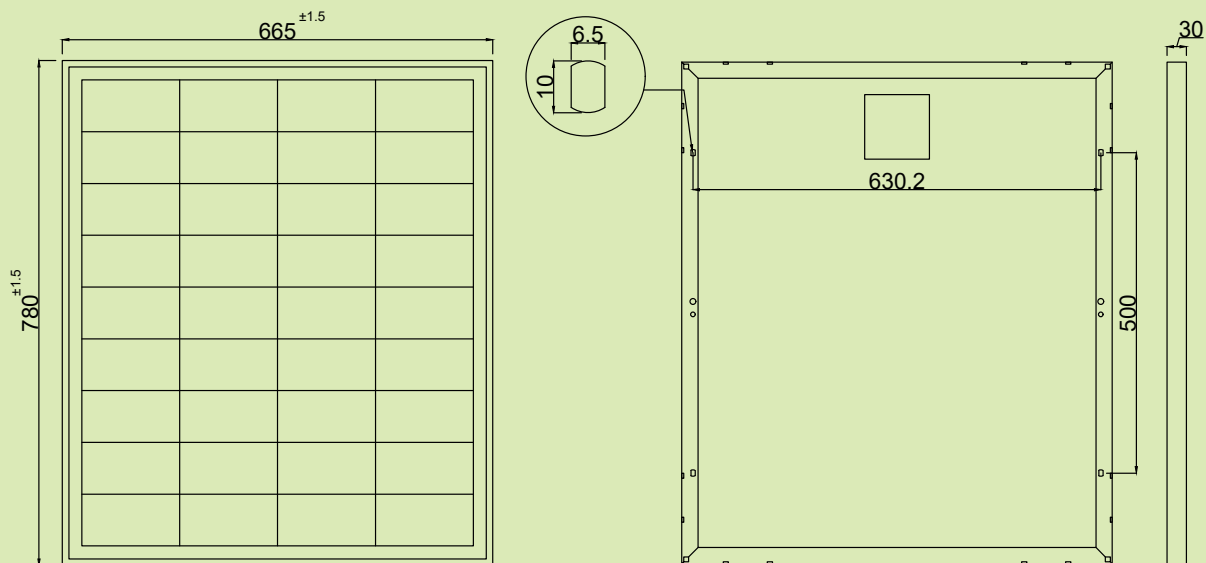

Manufactured by:

H.R. Solar Solution Pvt. Ltd.

14, NS Road, First floor, Room no. 102, Kolkata - 700001

Phone: +91 33 2243 4540

Website: www.hrsolarsolution.com

Email: info@hrsolarsolution.com

